




- Frequency: 340 MHZ.
- Input voltage: 12VDC with reverse polarity protection.
- The output relays are rated at 10A @12VDC.
- Operating temperature range: 0° F to 160° F.
- Transmit range is greater than 100 feet under normal operating conditions.
- Up to 30 keyfob transmitters can be used with each receiver.
- Both transmitters use 1 A23 12V Battery.

- 3-Button Keyfob Transmitter (P44066)
- 3-Button Waterproof Transmitter (KF340-3WP)
- Package of 6 A23 12V Alkaline Keyfob Batteries (A23-6)

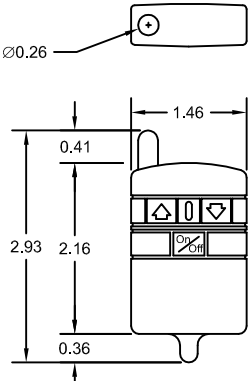

[illegible]

SIZE		HPC-1		REV.	
A				O	
REVISIONS					
LET.	WAS		DATE	APP.	ENTERED
O	Original Release				

Waterproof Transmitter (KF340-3WP) , Supplied in Waterproof Assembly, Waterproof to IP 65

Standard Transmitter (P44066) , Supplied in Standard Assembly

DECIMAL TOLERANCE UNLESS OTHERWISE SPECIFIED:


LINEAR:
 .xxxxx ±.0005
 .xxxx ±.001
 .xxx ±.003
 .xx ±.015
 x/x ±1/32
 x ±1/16


ANGULAR:
 .xxxx ±01°
 .xx ±01°
 x ±1°

THIS DRAWING IN ACCORDANCE WITH 000-STD-100 UNLESS OTHERWISE SPECIFIED.

All dimensions in inches.
(unless otherwise noted)

THIRD ANGLE PROJECTION





GAMA Electronics, Inc.

P.O. Box 1488, Crystal Lake, IL 60039

NAME Remote Control

DRN. KEG 06/07/16

RELEASED 06/07/16

MATERIAL

SHEET 1 OF 1