


RF12V1PR-ASL

RF Remote Control System, Reverse Polarity
12VDC Motor Control with Auxillary Switch Leads

<https://www.gamainc.com/product/rf12v1pr-asl/>

RF12V1PR-ASL Receiver Dimensions

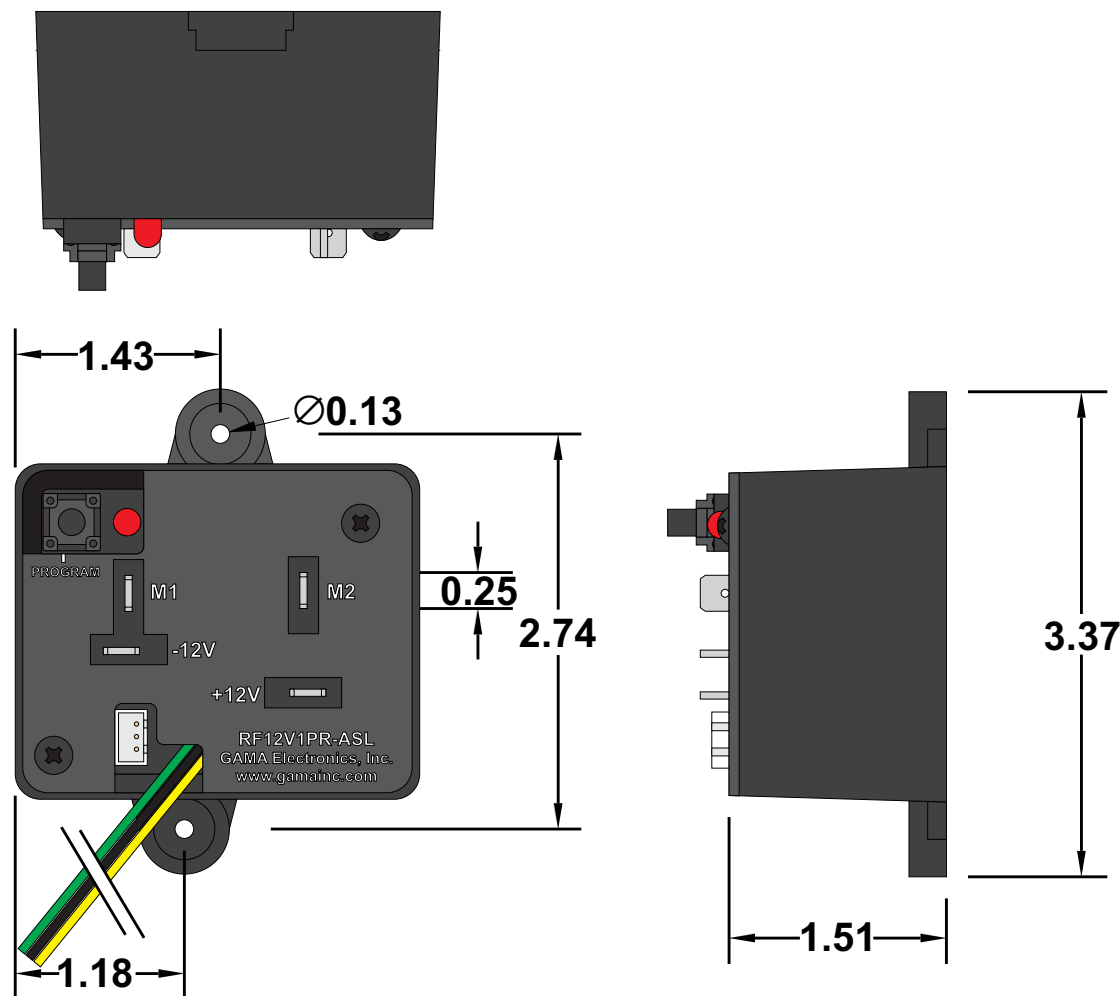

Functionality:

- Powered by 12VDC
- Single Pole, Double Throw control.
- Three Auxiliary Switch Leads
- Two normally open relay contacts.

GAMA ELECTRONICS

P.O. Box 1488, Crystal Lake, IL 60039

Phone: 815-356-9600

Fax: 815-356-9603

Email: gama@gamainc.com

www.gamainc.com

Specifications

- Frequency: 340 MHz.
- Input voltage: 12VDC with reverse polarity protection.
- The output relays are rated at 30A @12VDC.
- Operating temperature range: 0° F to 160° F.
- Transmit range is greater than 100 feet under normal operating conditions.
- Up to 12 keyfob transmitters can be used with each receiver.
- The waterproof transmitter (KF340-2WP) and standard transmitter (KF340-2) both use one A23 12V battery. The extended battery life transmitter (KF340-9VB-2) uses one 9 volt battery.
- Receiver has three 6" ASL wire leads.

Drawn By: KEG

Information contained herein is proprietary information of GAMA Electronics Inc. The dissemination use or duplication of this information, for any purpose other than that for which the information is provided, is prohibited except by express written permission.


All dimensions are in inches and have a +/- .015" tolerance unless otherwise specified.

Rev: 0

Release Date:
03/19/20

Pg. 1 of 5

Third Angle Projection



RF12V1PR-ASL


RF Remote Control System, Reverse Polarity
12VDC Motor Control with Auxillary Switch Leads

<https://www.gamainc.com/product/rf12v1pr-asl/>

Long Range Antenna

www.gamainc.com/product/lra-340


Included with long range option

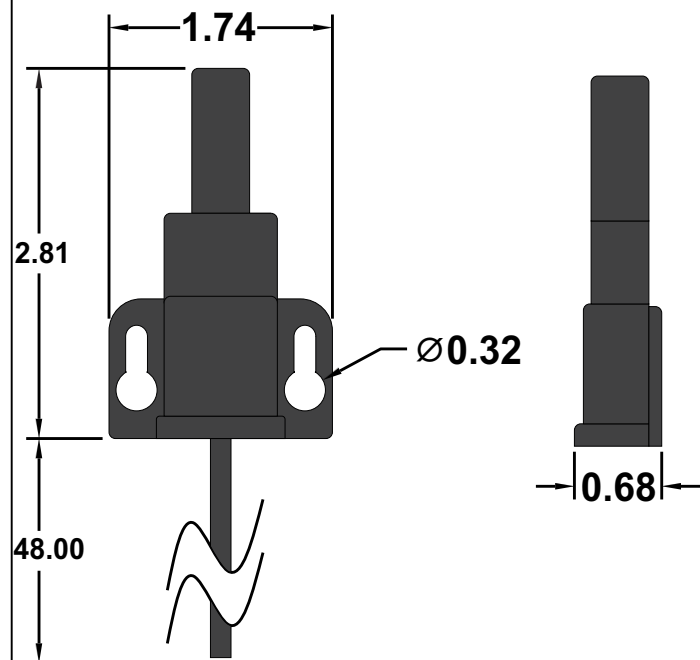

2-Button Keyfob Transmitter

www.gamainc.com/product/kf340-2/

Included with standard transmitter option

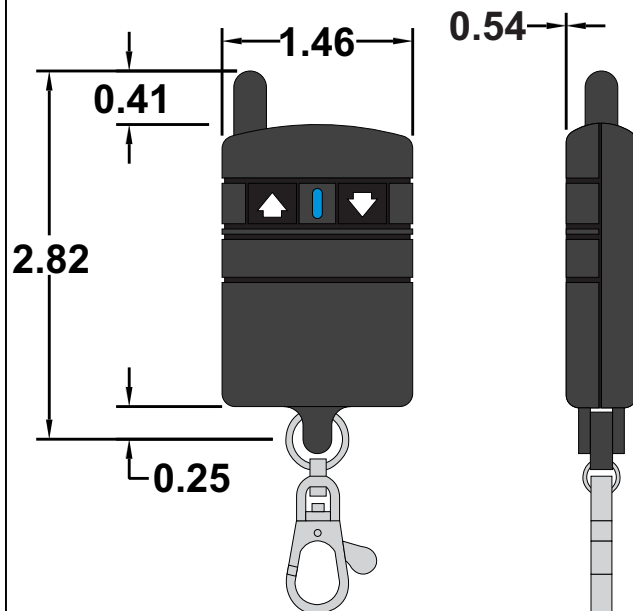

GAMA ELECTRONICS

P.O. Box 1488, Crystal Lake, IL 60039

Phone: 815-356-9600

Fax: 815-356-9603

Email: gama@gamainc.com

www.gamainc.com

Accessories Sold Separately

- Extra 2-Button Waterproof Transmitter ([KF340-2WP](#))
- Extra 2-Button Keyfob Transmitter ([KF340-2](#))
- Package of 6 replacement A23 12V Alkaline Keyfob Batteries ([A23-6](#))
- Clear Protective Transmitter Pouch ([ZLB-67](#))
- Extra 2-Button Rechargeable Transmitter ([GKF-WPTX-2](#))

Drawn By: KEG

Information contained herein is proprietary information of GAMA Electronics Inc. The dissemination use or duplication of this information, for any purpose other than that for which the information is provided, is prohibited except by express written permission.


All dimensions are in inches and have a +/- .015" tolerance unless otherwise specified.

Rev: 0

Pg. 2 of 5

Release Date:
03/19/20

Third Angle Projection



RF12V1PR-ASL


RF Remote Control System, Reverse Polarity
12VDC Motor Control with Auxillary Switch Leads

<https://www.gamainc.com/product/rf12v1pr-asl/>

2-Button Waterproof Transmitter


www.gamainc.com/product/kf340-2wp/

Included in waterproof transmitter
option

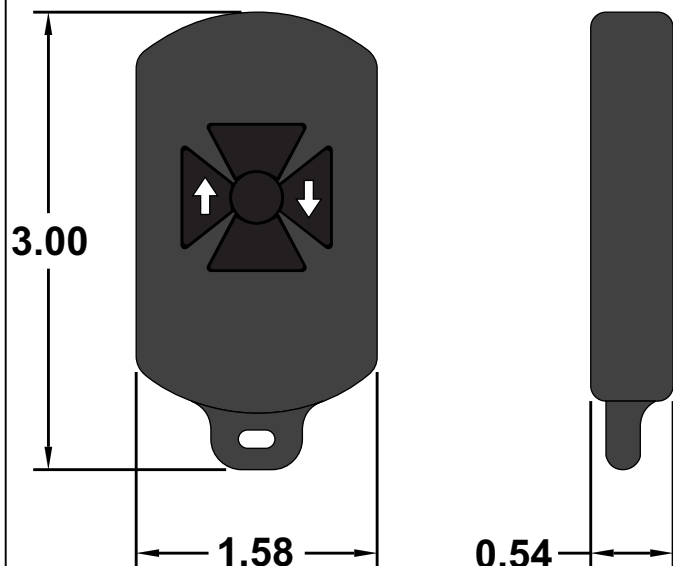

Waterproof Enclosure

Included with waterproof enclosure option

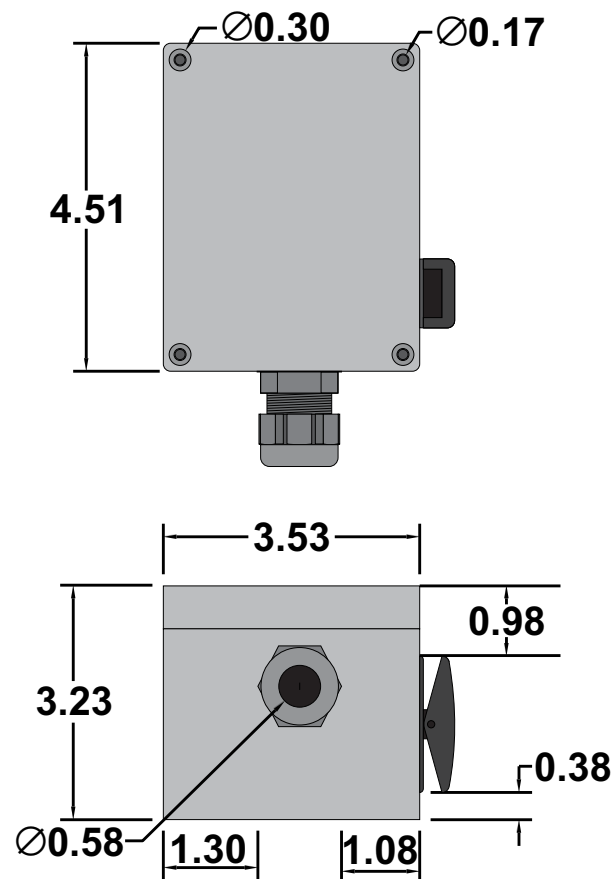

GAMA ELECTRONICS

P.O. Box 1488, Crystal Lake, IL 60039



Phone: 815-356-9600

Fax: 815-356-9603

Email: gama@gamainc.com

www.gamainc.com

Enclosure Mounting Details

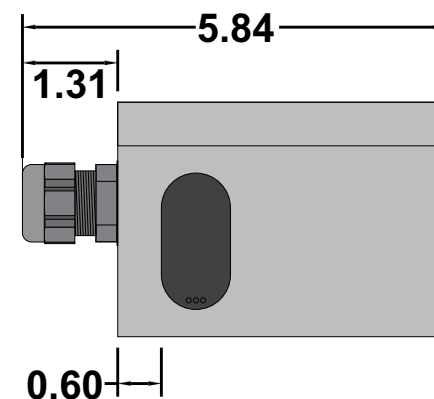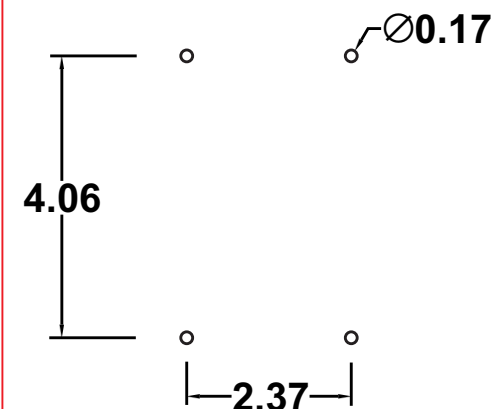

Drawn By: KEG

Information contained herein is proprietary information of GAMA Electronics Inc. The dissemination use or duplication of this information, for any purpose other than that for which the information is provided, is prohibited except by express written permission.


All dimensions are in inches and have a +/- .015" tolerance unless otherwise specified.

Rev: 0

Release Date:
03/19/20

Pg. 3 of 5

Third Angle Projection



RF12V1PR-ASL


RF Remote Control System, Reverse Polarity
12VDC Motor Control with Auxillary Switch Leads

<https://www.gamainc.com/product/rf12v1pr-asl/>

2-Button Rechargeable Transmitter

www.gamainc.com/product/gkf-wptx-2/

Included with rechargeable transmitter
option

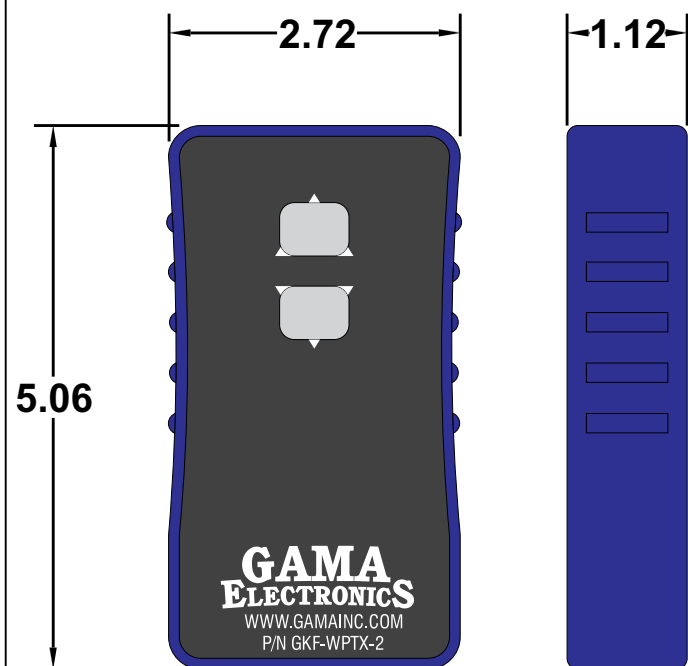

GAMA ELECTRONICS


P.O. Box 1488, Crystal Lake, IL 60039

Phone: 815-356-9600

Fax: 815-356-9603

Email: gama@gamainc.com

www.gamainc.com

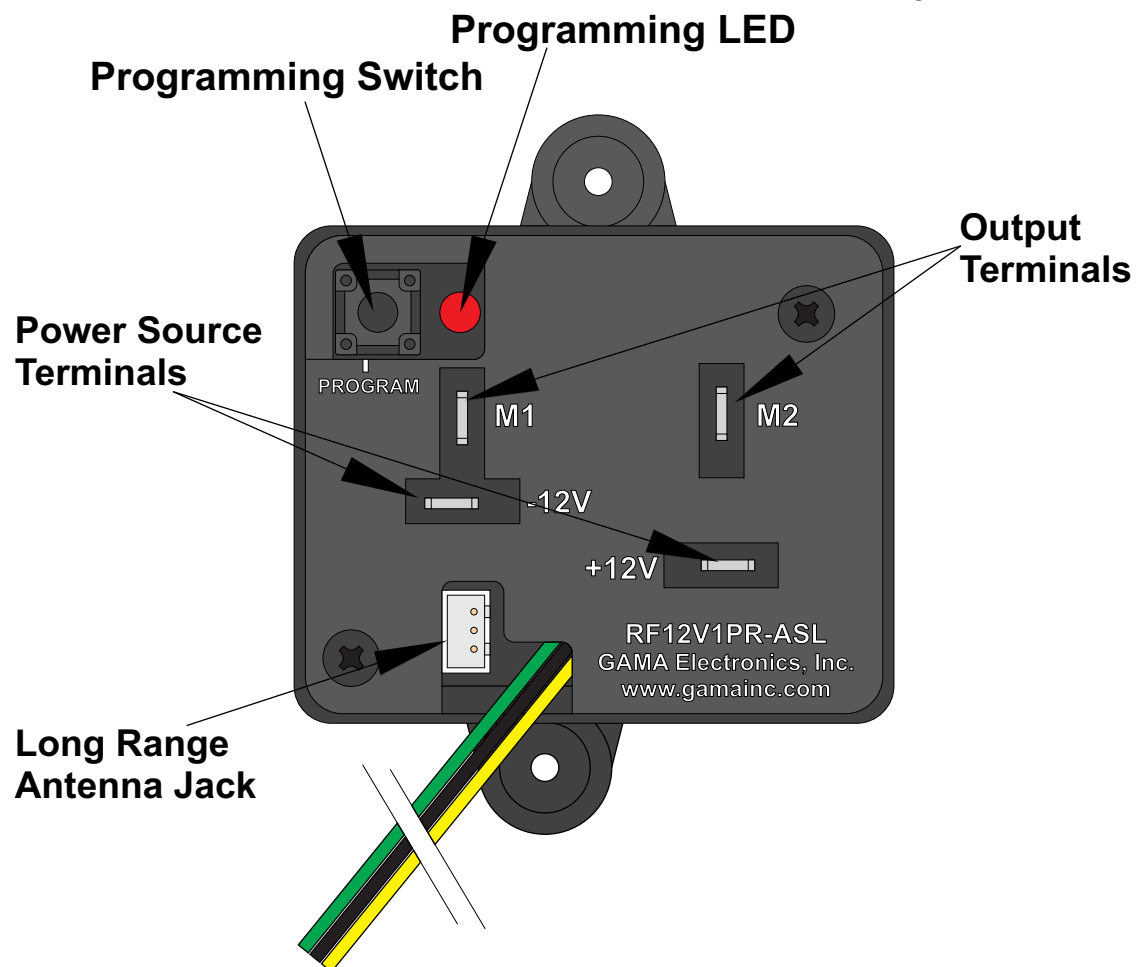

Drawn By: KEG

Information contained herein is proprietary information of GAMA Electronics Inc. The dissemination use or duplication of this information, for any purpose other than that for which the information is provided, is prohibited except by express written permission.


All dimensions are in inches and have a +/- .015" tolerance unless otherwise specified.

Rev: 0

Release Date:
03/19/20

Pg. 4 of 5

Third Angle Projection



RF12V1PR-ASL

RF Remote Control System, Reverse Polarity
12VDC Motor Control with Auxillary Switch Leads

<https://www.gamainc.com/product/rf12v1pr-asl/>

Wiring Diagram

GAMA ELECTRONICS


P.O. Box 1488, Crystal Lake, IL 60039

Phone: 815-356-9600

Fax: 815-356-9603

Email: gama@gamainc.com

www.gamainc.com

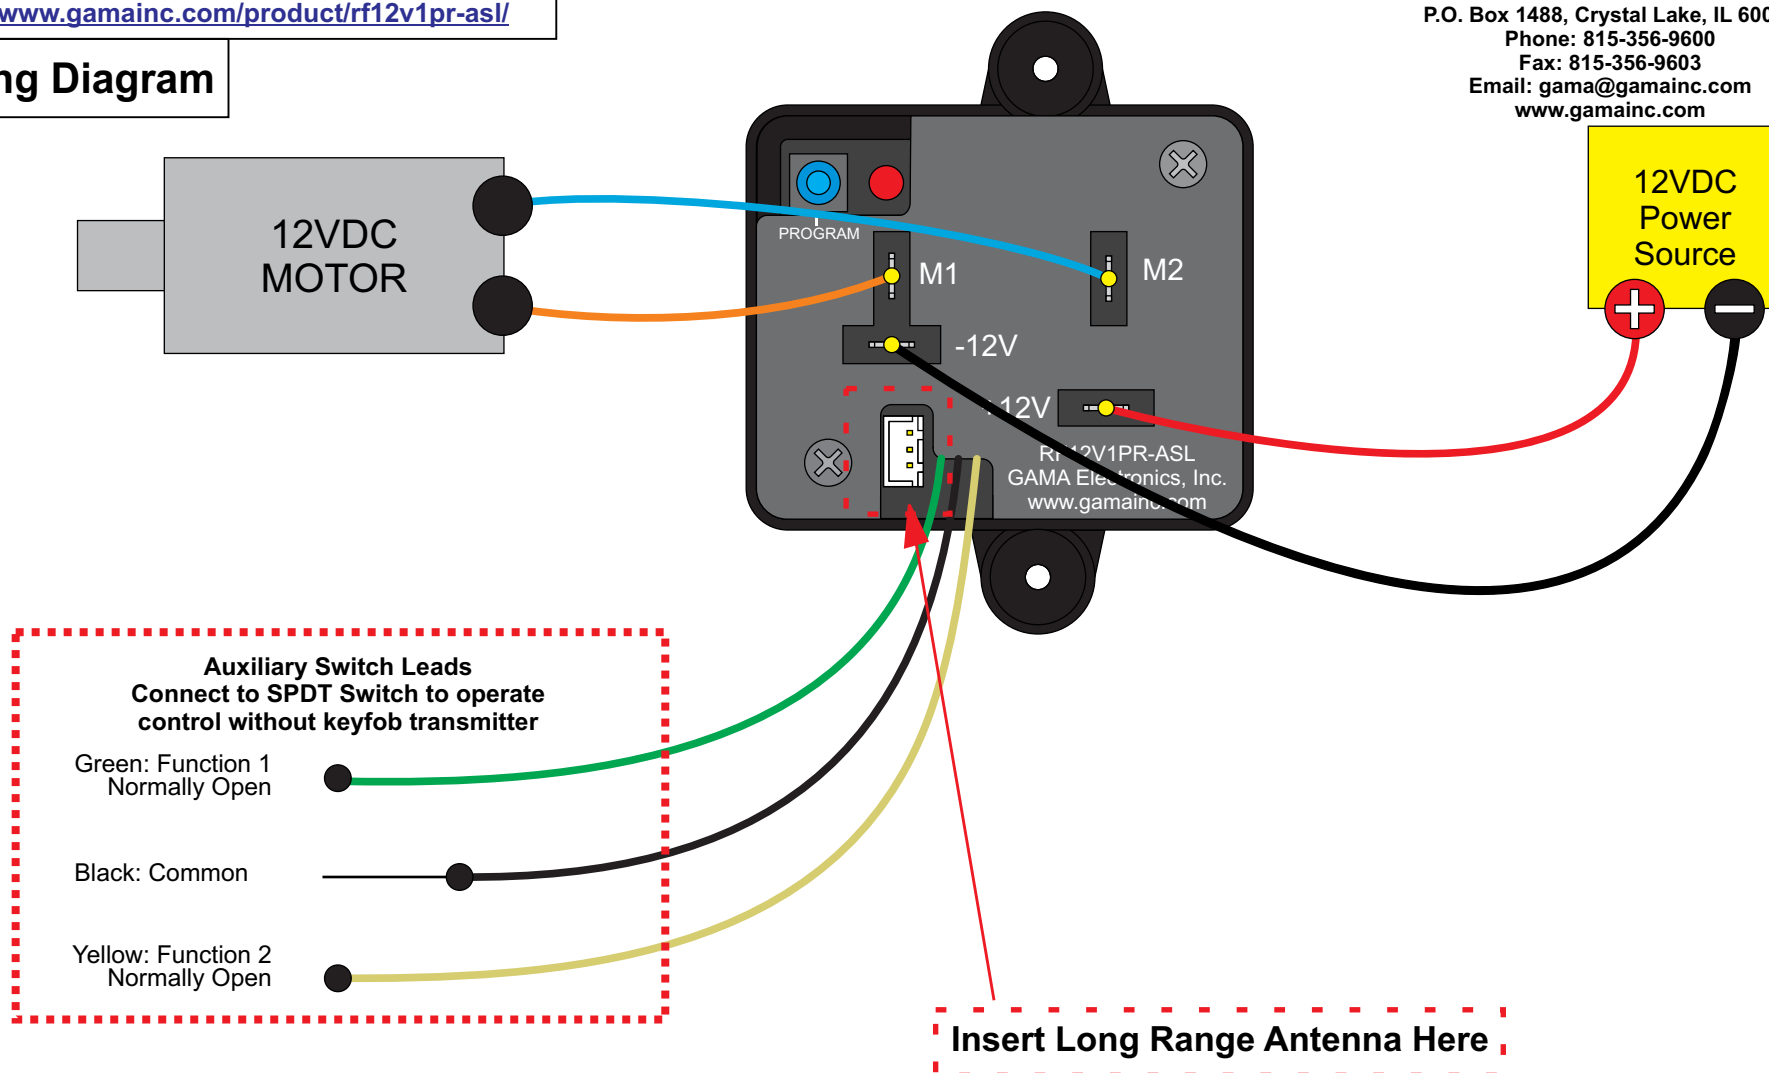

Drawn By: KEG

Information contained herein is proprietary information of GAMA Electronics Inc. The dissemination use or duplication of this information, for any purpose other than that for which the information is provided, is prohibited except by express written permission.

All dimensions are in inches and have a +/- .015" tolerance unless otherwise specified.

Rev: 0

Release Date:
03/19/20

Pg. 5 of 5

Third Angle Projection

