
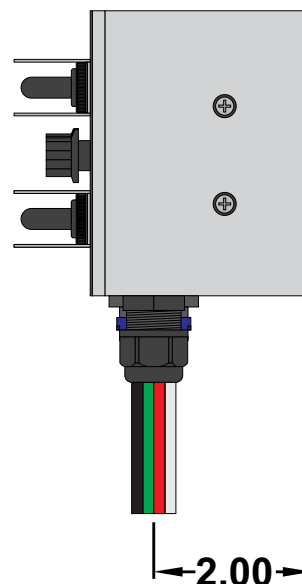


80A-SC

Reverse Polarity Motor Control with Speed Control

<https://www.gamainc.com/product/80a-sc/>

RF340-80A-SC Receiver Dimensions

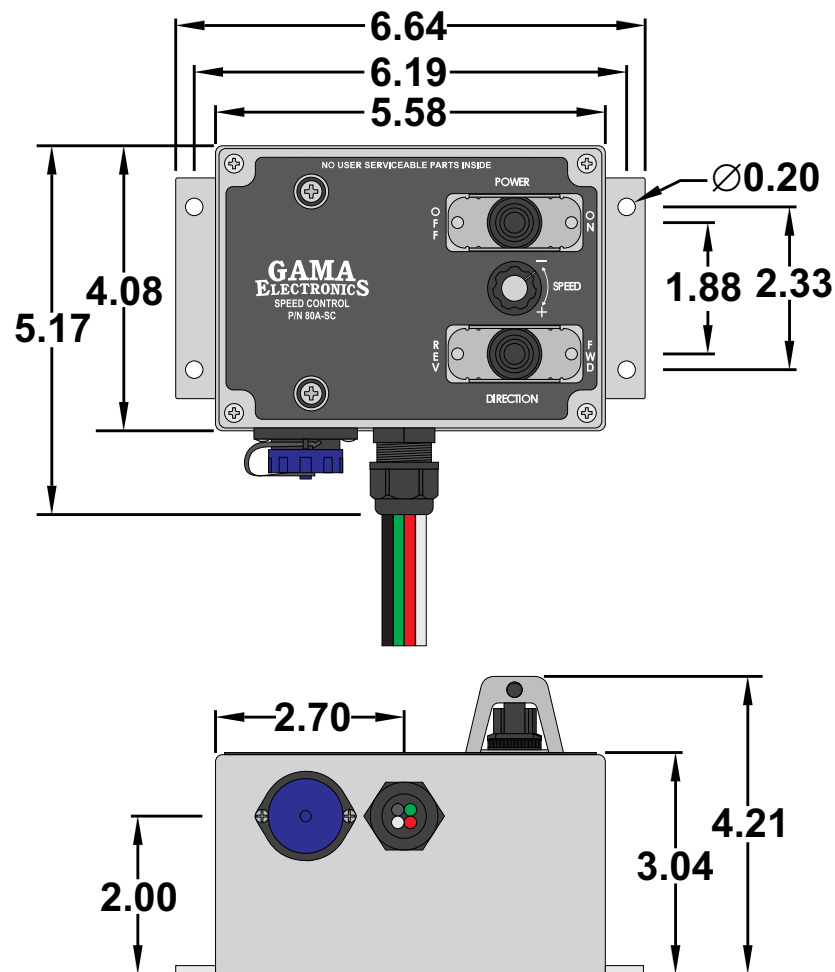

GAMA ELECTRONICS

P.O. Box 1488, Crystal Lake, IL 60039

Phone: 815-356-9600

Fax: 815-356-9603

Email: gama@gamainc.com

www.gamainc.com

Specifications

- Input voltage: 12VDC with reverse polarity protection.
- The output relays are rated at 80A @12VDC.
- Operating temperature range: 0°F to 160°F.
- Typical transmit range is 100 feet.
- Remote control operation can be programmed for momentary or latching operation.

Drawn By: KEG

Information contained herein is proprietary information of GAMA Electronics Inc. The dissemination use or duplication of this information, for any purpose other than that for which the information is provided, is prohibited except by express written permission.


All dimensions are in inches and have a +/- .015" tolerance unless otherwise specified.

Rev: 0

Pg. 1 of 2

Release Date:
07/31/18

Third Angle Projection



80A-SC


Reverse Polarity Motor Control with Speed Control

<https://www.gamainc.com/product/80a-sc/>

Long Range Antenna

www.gamainc.com/product/lra-340/


Included with RF-function option

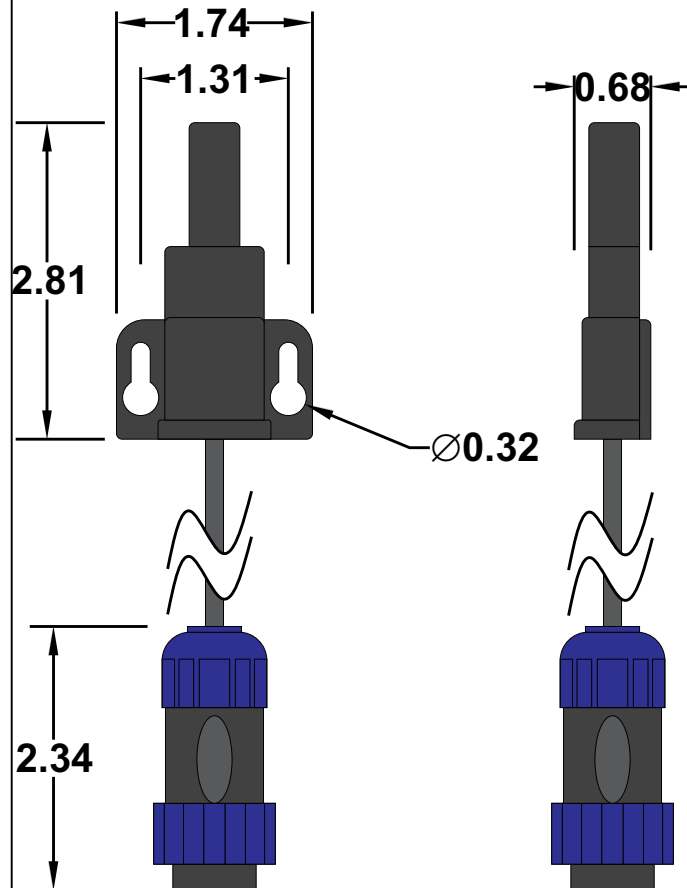

Speed Control Transmitter

www.gamainc.com/product/t-sc-12v-wpt/

Included with RF-function option

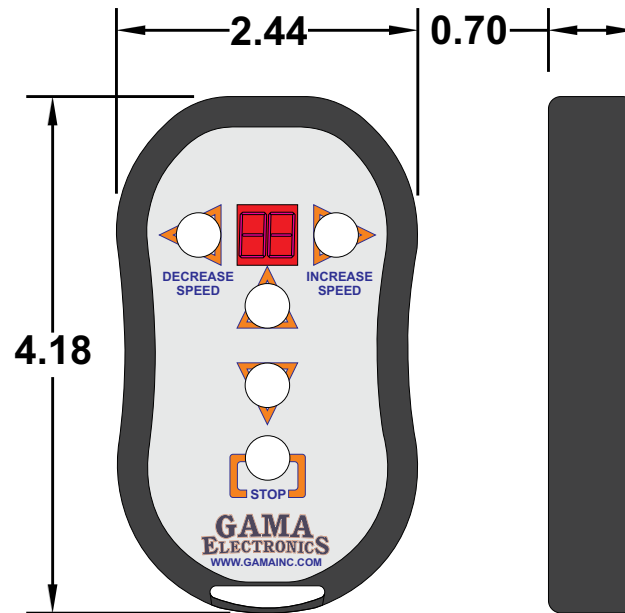

GAMA ELECTRONICS

P.O. Box 1488, Crystal Lake, IL 60039

Phone: 815-356-9600

Fax: 815-356-9603

Email: gama@gamainc.com

www.gamainc.com

Drawn By: KEG

Information contained herein is proprietary information of GAMA Electronics Inc. The dissemination use or duplication of this information, for any purpose other than that for which the information is provided, is prohibited except by express written permission.

All dimensions are in inches and have a +/- .015" tolerance unless otherwise specified.

Rev: 0

Release Date:
07/31/18

Pg. 2 of 2

Third Angle Projection

